




YNR Bearings Co., Ltd.

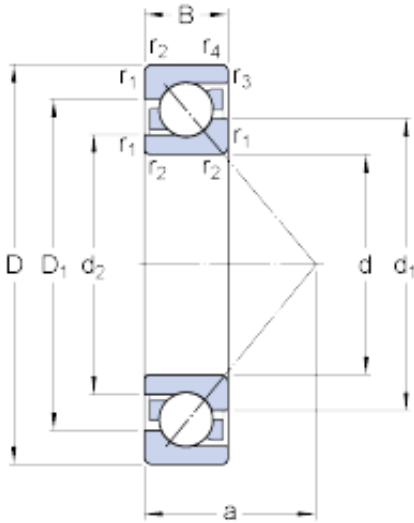

110 mm x 200 mm x 38 mm SKF 7222 BECBP Angular contact ball bearing

Bearing No. 7222 BECBP

7222 BECBP Bearing 2D drawings and 3D CAD models

| | |
|---|---------------|
| Size | 200x110x38 mm |
| Bore Diameter | 200 mm |
| Outer Diameter | 110 mm |
| Width | 38 mm |
| d | 110 mm |
| D | 200 mm |
| B | 38 mm |
| d ₁ | 144.85 mm |
| d ₂ | 127.12 mm |
| D ₁ | 167.35 mm |
| a | 84 mm |
| r _{1,2} - min. | 2.1 mm |
| r _{3,4} - min. | 1.1 mm |
| d _a - min. | 122 mm |
| D _a - max. | 188 mm |
| D _b - max. | 193 mm |
| r _a - max. | 2 mm |
| r _b - max. | 1 mm |
| Basic dynamic load rating - C | 170 kN |
| Basic static load rating - C ₀ | 166 kN |
| Fatigue load limit - P _u | 5.7 kN |
| Reference speed | 4000 r/min |
| Limiting speed | 4000 r/min |
| Calculation factor - k _r | 0.095 |



YNR Bearings Co., Ltd.

| | |
|---------------------------------|-------------------------------|
| Calculation factor - k_a | 1.4 |
| Calculation factor - e | 1.14 |
| Calculation factor - X | 0.57 |
| Calculation factor - Y_0 | 0.52 |
| Calculation factor - Y_1 | 0.55 |
| Calculation factor - Y_2 | 0.93 |
| Calculation factor - X | 0.35 |
| Calculation factor - Y_0 | 0.26 |
| Calculation factor - Y_1 | |
| Calculation factor - Y_2 | 0.57 |
| Category | Angular Contact Ball Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 4.54 |
| EAN | 7316577150325 |
| Product Group | B00308 |
| Enclosure | Open |
| Flush Ground | Yes |
| Rolling Element | Ball Bearing |
| Number of Rows of Balls | Single Row |
| Precision Class | ABEC 1 ISO P0 |
| Maximum Capacity / Filling Slot | No |
| Snap Ring | No |
| Cage Material | Polyamide |
| Contact Angle | 40 Degree |
| Internal Clearance | CB |
| Number of Bearings | 1 (Single) |
| Mounting Arrangement | Universal |
| Inch - Metric | Metric |



YNR Bearings Co., Ltd.

| | |
|------------------------------|--|
| Long Description | 110MM Bore; 200MM Outside Diameter; 38MM Width; Open; Yes Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; CB; Polyamide Cage; 40 Degree; 1 (Single); Un |
| Other Features | Normal Axial Internal Clearance |
| Category | Angular Contact Ball Bearing |
| UNSPSC | 31171531 |
| Harmonized Tariff Code | 8482.10.50.28 |
| Noun | Bearing |
| Keyword String | Angular Contact |
| Manufacturer URL | http://www.skf.com |
| Manufacturer Item Number | 7222 BECBP |
| Width | 1.496 Inch 38 Millimeter |
| Bore | 4.331 Inch 110 Millimeter |
| Outside Diameter | 7.874 Inch 200 Millimeter |
| bore diameter: | 110 mm |
| radial static load capacity: | 166 kN |
| outside diameter: | 200 mm |
| cage material: | Nylon |
| overall width: | 38 mm |
| outer ring width: | 38 mm |
| contact angle: | 40 ° |
| maximum rpm: | 4000 RPM |
| row type & fill slot: | Single-Row Non-Fill Slot |
| finish/coating: | Uncoated |
| internal clearance: | C0 |
| precision rating: | Not Rated |
| closure type: | Open |
| fillet radius: | 2 mm |



YNR Bearings Co., Ltd.

| | |
|--------------------------------|-----------|
| radial dynamic load capacity: | 170 kN |
| series: | 72 |
| d_1 | 144.85 mm |
| d_2 | 127.12 mm |
| D_1 | 167.35 mm |
| $r_{1,2}$ min. | 2.1 mm |
| $r_{3,4}$ min. | 1.1 mm |
| d_a min. | 122 mm |
| D_a max. | 188 mm |
| D_b max. | 193 mm |
| r_a max. | 2 mm |
| r_b max. | 1 mm |
| Basic dynamic load rating C | 163 kN |
| Basic static load rating C_0 | 156 kN |
| Fatigue load limit P_u | 5.3 kN |
| Calculation factor A | 0.353 |
| Calculation factor k_r | 0.095 |
| Calculation factor e | 1.14 |
| Calculation factor X | 0.35 |
| Calculation factor Y_0 | 0.26 |
| Calculation factor Y_2 | 0.57 |
| Calculation factor X | 0.57 |
| Calculation factor Y_0 | 0.52 |
| Calculation factor Y_1 | 0.55 |
| Calculation factor Y_2 | 0.93 |
| Mass bearing | 4.6 kg |